


Sensor-switched LED outdoor light

Anthracite
EAN 4007841 081713
Article number 081713

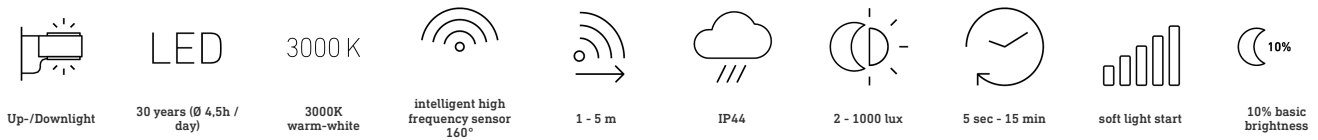

Function description

Sensor-switched LED outdoor light

Anthracite
EAN 4007841 081713
Article number 081713



Technical specifications

Dimensions (L x W x H)	146 x 230 x 261 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Mounting height max.	2,50 m
Sensor Technology	iHF (intelligent high-frequency technology)
Transmitter power	
Output	9,8 W
Interconnection	Yes
Type of interconnection	Master/master
Slave mode/selectable	Yes
Luminous flux	679 lm
Efficiency	69 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
LED life expectancy (25 °C)	> 60000 h
Drop in luminous flux in accordance with LM80	L70B10
Base	without
LED cooling system	Active and Passive Thermo Control
With motion detector	Yes
Detection angle	160 °
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	Yes


Mechanical scalability	No
Reach, detail	Detection zone adjustable on 2 axes
Reach, radial	r = 5 m (35 m ²)
Reach, tangential	r = 5 m (35 m ²)
Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 60 Min.
Basic light level function	Yes
Basic light level function time	1-30 min, all night
Main light adjustable	50 - 100 %
Functions	Motions sensor
Soft light start	Yes
Continuous light	selectable, 4h
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Transmitter range	30 m
Housing material	Aluminium
Cover material	Plastic, opal
Manufacturer's Warranty	3 years
includes sheet of self-adhesive numbers	No
Settings via	Bluetooth, Bluetooth Mesh, App
With remote control	No
Version	Anthracite
PU1, EAN	4007841081713

Sensor-switched LED outdoor light

Anthracite
EAN 4007841 081713
Article number 081713



Detection Zone

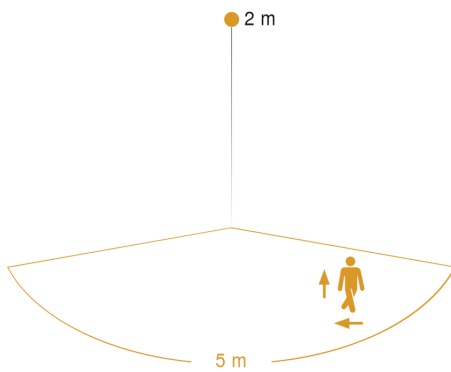

Mögliche Montagehöhe: 1,80 m – 2,50 m
Orange: radial und tangential

Dimension Drawing

