
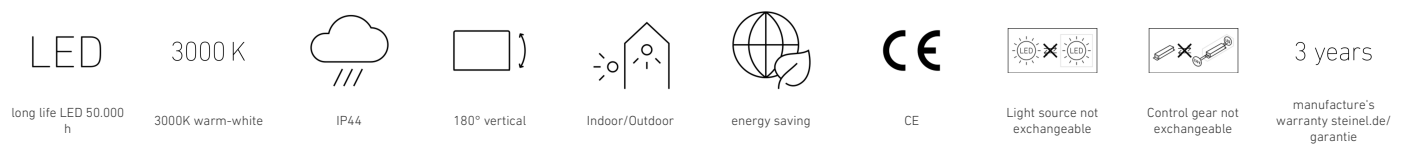


LED floodlight without sensor

XLED ONE XL

white
EAN 4007841 065232
Article number 065232

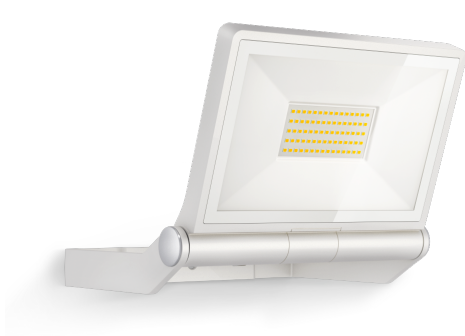

Function description

Powerful lighting very big on style. The XLED ONE XL with an output of 42,6 W delivers a powerful 3000 K and of warm white light. Tilting through 180°, the wall and ceiling spot is fitted with high-quality and particularly long-lasting LEDs with a service life of a good 30 years – without any ifs or buts. Protection class: IP44.

Technical specifications

Dimensions (L x W x H)	193 x 259 x 215 mm
With lamp	Yes, STEINEL LED system
With motion detector	No
Manufacturer's Warranty	3 years
Version	white
PU1, EAN	4007841065232
Application, place	Outdoors
Application, room	outdoors, courtyard & driveway
Installation site	wall, ceiling
Installation	Wall, Ceiling, Surface wiring
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	from -20 up to 40 °C
Housing material	Aluminium
Cover material	Glass transparent

Mains power supply	220 – 240 V / 50 – 60 Hz
Photo-cell controller	No
Luminous flux total product	4200 lm
Total product efficiency	99 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Service life LED L70B50 (25°)	> 36000 h
Drop in luminous flux in accordance with LM80	L70B10
LED cooling system	Passive Thermo Control
Basic light level function	No
Output	42,6 W
Colour Rendering Index CRI	= 80
Product category	LED floodlight without sensor

<https://www.steinel.de>

Subject to technical modifications

04.2025 Page 1 from 2


LED floodlight without sensor

XLED ONE XL

white
EAN 4007841 065232
Article number 065232



Dimension Drawing

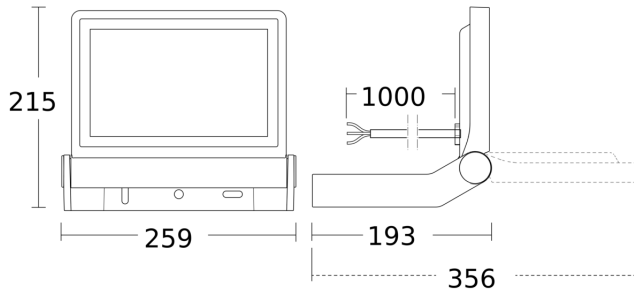

Circuit diagram

