24V-Garden LED light

Stela C 24V Starter Set

860 mm
EAN 4007841 097691
Article number 097691

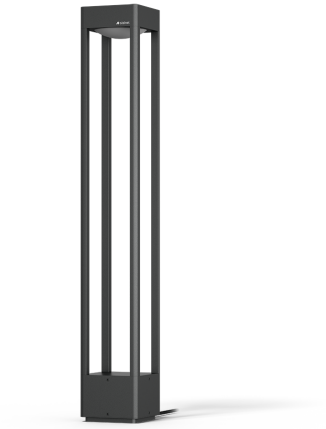

outdoor light

Plug & Play - easy to install

Low-voltage system

Bluetooth Mesh

Settings via App

IP65

Light source not exchangeable

Control gear not exchangeable

CE

3 years

manufacture's warranty steinel.de/garantie

Function description

Starter Set: Set up, connect and instantly create atmosphere. With the Stela C 24V Starter Set, you can bring stylish lighting ambience directly to your garden or balcony. The set includes one Stela C 24V 860 mm, a 35 W power supply and a 1 m connection cable – everything you need to get started right away. The slim bollard light creates elegant vertical lighting accents and is especially easy to install thanks to Plug & Play: position, connect, plug in – done. Using the STEINEL Connect app, you can conveniently adjust the light colour and create the perfect atmosphere for any evening in no time.

Technical specifications

Dimensions (L x W x H)	130 x 130 x 860 mm
With lamp	Yes, STEINEL LED system
Manufacturer's Warranty	3 years
Settings via	Bluetooth Mesh
With remote control	No
Version	860 mm
PU1, EAN	4007841097691
Application, place	Outdoors
Application, room	outdoors, garden, terrace / balcony
Colour	Anthracite
includes sheet of self-adhesive numbers	No
Package content	1
Installation site	Floor
IP-rating	IP65
Protection class	III
Ambient temperature	from -20 up to 40 °C

Colour variation LED	SDCM3
Lamp	LED cannot be replaced
Service life LED L70B50 (25°)	> 60000 h
Continuous light	selectable
Functions	DIM function, Color temperature change, Group parameterisation, Light sensor, Neighbouring group function, Push button configuration, Pushbutton / switch mode
Twilight setting	2 – 2000 lx
Main light adjustable	10 - 100 %
Twilight setting TEACH	Yes
Interconnection	Yes
Interconnection via	Bluetooth Mesh
Colour Rendering Index CRI	= 83
R9-Farbwiedergabeindex	11
Product category	24V-Garden LED light
Ausführung des Betriebsgeräts	with twilight switch

24V-Garden LED light

Stela C 24V Starter Set

860 mm
EAN 4007841 097691
Article number 097691

Technical specifications

Housing material	Aluminium
Cover material	Plastic, structured
Output	9,2 W
Average rated life expectancy of power supply unit at 25°C	> 60000 h
Photo-cell controller	Yes
Luminous flux total product	547 lm
Colour temperature	all colors + 1800-4000 K

Anzahl der Ausgänge	1
Geeignet für Konstantspannung	Yes
Geeignet für Konstantstrom	No
Ausgangsleistung	35 W
Ausgangsstrom	1,45 mA
Ausgangsspannung	24 V
Cord length	0.65 m
Notlichtfunktion	without

Accessories

EAN 4007841 088620	Wireless pushbutton TapDuo C
EAN 4007841 089283	Cable 24V 2,5m
EAN 4007841 089276	Cable 24V 1m
EAN 4007841 089290	Cable 24V 5m
EAN 4007841 089252	Power Supply 24V 35 W
EAN 4007841 089269	Power Supply 24V 100 W
EAN 4007841 089306	T-Connector 24V
EAN 4007841 089313	Cross Connector 24V
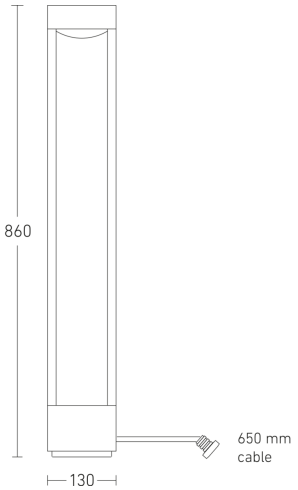
Dimension Drawing