

Multisensor Air KNX

V3.0

EAN 4007841 056346



air humidity



air pressure



brightness



CO2



temperature



VOC



KNX



manufacturer's warranty
steinel-professional.de/garantie



CE

Function description

Multisensor AIR KNX, the air, brightness and temperature specialist. Multisensor Air KNX delivers reliable additional information to the building management system. It measures temperature, humidity, air pressure, volatile organic compounds (VOC), CO2 concentration as well a brightness. Without True Presence® detection. But geared towards the design if the True Presence family. For a modern ceiling look all round. KNX interface for easy integration.

Technical specifications

Type	Other
Dimensions (L x W x H)	33 x 123 x 123 mm
Mains power supply	30 V
Power consumption	0,5 W
Sensor Technology	Multisensor
Application, place	Indoors
Installation site	ceiling
Installation	Concealed wiring
Mounting height	4,00 m
Optimum mounting height	2,8 m
Twilight setting TEACH	Yes
Twilight setting	2 – 1000 lx
Constant-lighting control	No
Basic light level function	Yes

KNX functions	Comfort, CO2, Light level, HVAC output, Air pressure, Humidity output, Dewpoint, Temperature output, VOC, Photo-cell controller, Logic gate
With bus coupling	Yes
Settings via	ETS software, Bluetooth, Bus
With remote control	No
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
IP-rating	IP20
Material	Plastic
Ambient temperature	0 – 40 °C
Application, room	classroom, lecture hall, one-person office, open-plan office, conference room / meeting room, hotel room, care room, duty room, recreation room, sports hall, reception / lobby, Indoors
Colour	white
Colour, RAL	9016
Manufacturer's Warranty	5 years
PU1, EAN	4007841056346

Multisensor Air KNX


V3.0

EAN 4007841 056346

Accessories

EAN 4007841 063870 Surface-mounting adapter for Multisensor

Detection Zone

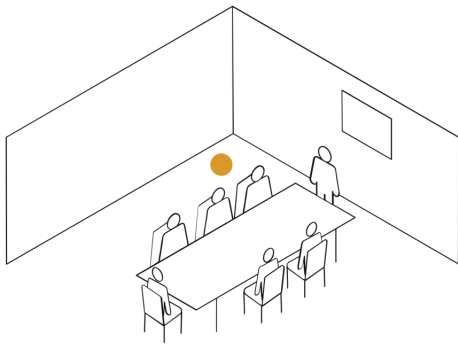

Dimension Drawing

